

2026 TURNAROUND MECHANICAL DECOKE

Coker Furnace — PR-170002

Job Report | USADebusk | Cenovus Lima Refinery — Lima, OH

PROJECT NO.	FACILITY	EXECUTION	PROJECT MANAGER
USA26046	Cenovus Lima Refinery	Sep 27 – 30, 2026	Peter Campbell
WORK ORDER	SCOPE	HEATER	DURATION
82096135	TA Mechanical Decoke	PR-170002	4 days

73	0	64	4
OPERATING HOURS	STAND-BY HOURS	PIGS RUN	PASSES

Project Information

Customer Details

FACILITY	Cenovus Lima Refinery
ADDRESS	1150 S Metcalf St, Lima, OH 45804
WORK ORDER	82096135
CONTACT	Kaleb Dodson

Project Details

SCOPE	2026 turnaround mechanical decoke of the Coker Furnace
EXECUTION	September 27 – 30, 2026 (4 days)
HEATER	PR-170002 Coker Furnace
EQUIPMENT	(1) Trimax Pumper (Trimax 5) · (1) Support Unit · 4x3 Pump · Crew Truck

Crew Details

PROJECT MANAGER	Peter Campbell
SHIFT LEAD	Day — Peter Campbell, Jesse Utsey (Sep 30); Night — James McDaniel
DAYSHIFT	Marshall Douglas, Travis Trenholm, Adrian Garza, David Charles, Blake Harman
NIGHTSHIFT	Mikee Green, Justin Kelly, Jeremiah Harman

Project Duration

SCOPE	UNIT	RIG	PIG	SMART PIG	SUBTOTAL
PR-170002 Coker Furnace	Trimax 5	22	51	0	73


Stand-By Summary

No stand-by was recorded on the daily service receipts: all 73 pumping-unit hours on this heater were operating hours.

PR-170002 — Coker Furnace

Number of Passes	4, pigged as 3 circuits: convection (4 coils looped as one), radiant A + B, radiant C + D
Total Footage	15,904 ft (3,976 ft per pass)
Tube ID	3.398" (4" OD tube); radiant outlet section 3.624" (4" Sch 120)
Metallurgy	9Cr-1Mo
Return Bends	Cast 180° U-bends

Decoking Analysis: The convection section showed light fouling and the radiant section moderate fouling. The crossovers were removed, the convection was pigged as a single circuit, and the radiant passes were looped A + B and C + D with temporary 180° returns at the radiant inlet flanges. Average pigging time was approximately 51 hours per circuit.

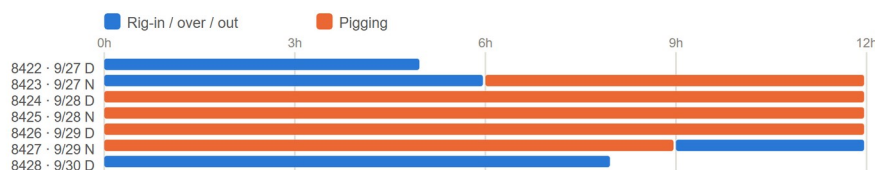

PR-170002 - task hours by shift, from the daily service receipts.

Pigs Used

SIZE — QTY	SIZE — QTY	SIZE — QTY	SIZE — QTY	SIZE — QTY
3" — 3	3.25" — 6	3.5" — 6	3.75" — 14	4" — 2
3.125" — 3	3.375" — 5	3.625" — 21	3.875" — 4	
TOTAL — 64				

Flow Tests

All convection

GPM	BEFORE PSI	AFTER PSI	Δ PSI
350	435	375	60
300	330	290	40
250	220	180	40

Passes A + B

GPM	BEFORE PSI	AFTER PSI	Δ PSI
350	370	275	95
300	290	200	90
250	210	146	64

Passes C + D

GPM	BEFORE PSI	AFTER PSI	Δ PSI
350	419	287	132
300	320	219	101
250	225	159	66

Project Summary

USADebusk performed the mechanical decoke of the Coker Furnace (PR-170002) for Cenovus at the Lima Refinery during the 2026 turnaround, September 27 – 30, on Trimax 5. The crossovers were removed and the heater was pigged as three circuits: the convection as one, and the radiant passes looped A + B and C + D. The heater ran 73 operating hours with no stand-by, using 64 pigs.

Project Close

The Coker Furnace was cleaned and returned to Cenovus, and all equipment was demobilized from the facility on September 30, 2026.

USADebusk thanks the Cenovus Lima team for their coordination and support throughout the turnaround, and we look forward to continuing to serve your decoking and pigging needs.

Jesse Utsey | Project Manager, USADebusk
713-252-8516 | JUtsey@USADebusk.com